


## **Carousel Rotating Table**

Speed Check's Carousels are used for cart makeup and are located at the end of flatwork conveyors. The circular shape offers greater access to the goods, allowing multiple carts in a condensed area, and provides space for more operators to transfer goods to the carts. It's made with a 12-gauge stainless steel bed with painted mild steel sides and a heavy-duty structural steel frame. The side gap opening allows linen transfer from a belt conveyor.

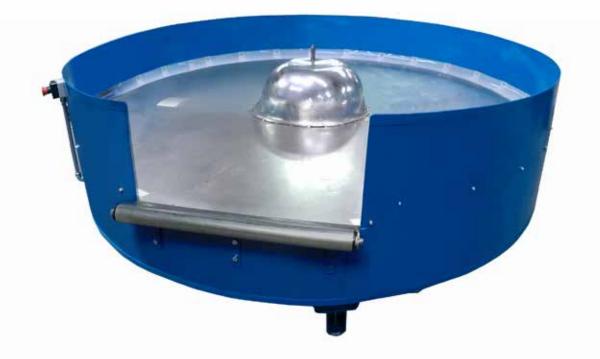


## **Carousel Rotating Table**


## **Standard Features**


- 12 Ga. stainless steel bed with painted mild steel sides
- ✓ Heavy duty painted structural steel frame
- ✓ <sup>1</sup>/<sub>3</sub> horsepower motor 115V 1 PH (available <sup>1</sup>/<sub>3</sub> HP 3PH)
- I RPM uni-directional conveyor speed
- 6'0" or 7'6" overall diameter
- Start/stop push button control

## **Available Options**

- 12 Ga. stainless steel bed with stainless steel sides
- Reversing drive
- UHMW gap pieces and gap rollers for smooth transition from belt conveyor.
- Inverter drives for speed adjustment







Carousel height customizable to specification.



5345 Truman Drive • Decatur, GA 30035 1-800-241-0990 • 1-770-981-5490 speedcheckconveyor.com